

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



JP5315064

Biblio Page 1



HIGH FREQUENCY WELDING DEVICE

Patent Number: JP5315064
Publication date: 1993-11-26
Inventor(s): OKAMOTO YOSHIMASA; others: 01
Applicant(s): NIPPON KINZOKU CO LTD; others: 01
Requested Patent: ☐ JP5315064
Application Number: JP19920115853 19920508
Priority Number(s):
IPC Classification: H05B6/10 ; H05B6/36
EC Classification:
Equivalents: JP3112560B2

Abstract


PURPOSE: To detect a position relation between a coil and a mounting member, completion of heat welding, etc., by detecting impedance of a high frequency heating coil in a heating part by a detecting circuit, and performing a display corresponding to a change of the impedance.
CONSTITUTION: A mounting member 5 is buried in concrete of a member in a fixed side, for instance, land roof 4 of a building. The member 5 is a metallic disk and buried in the concrete with a predetermined space. The member 5 is coated with a heat welding bonding agent 7. A thermoplastic waterproof sheet 8 is piled on the roof 4. The member 5 is heated by a high frequency heating coil 2 on the sheet 8 to bond it to the member 5. When turned on a starting switch 11 provided in a handle 18 of the heating part 2, a lamp in a heating display part 12 is turned on, and when a position of the member 5 agrees with a position of a coil 9, impedance detected by a detecting circuit in a main unit 1 is increased to a maximum to turn on a position display lamp. Just before completing welding the member 5 to the sheet 8, the impedance is rapidly increased to turn on a welding display lamp.

Data supplied from the esp@cenet database - 12


(5)

特開平5-815064


【図1】

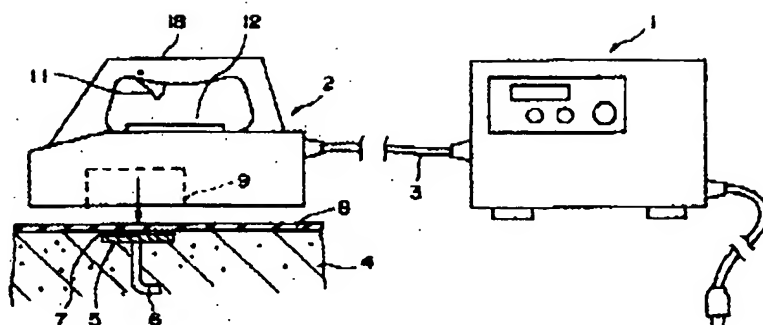


【図2】

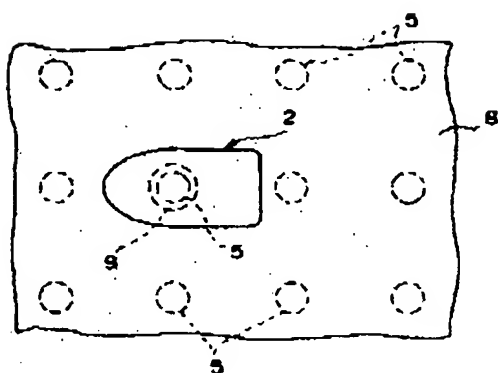

【図3】

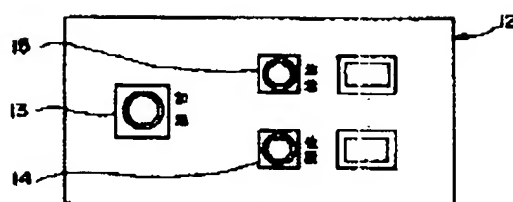

【図6】

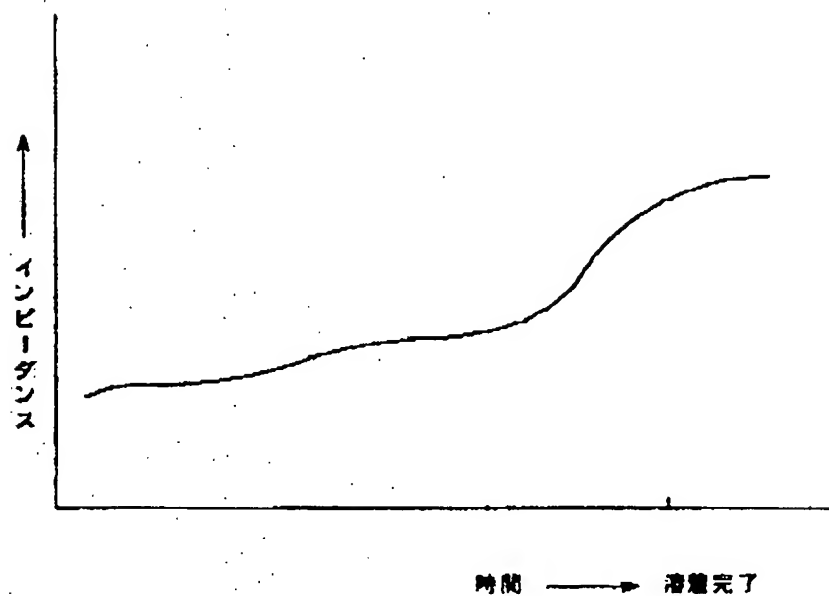

(6)

特開平5-315064

【図4】

